


Features

- *HPNA Compatible
- *SCTE compliant F-Ports
- *Low port to port isolation
(enable passing HPNA signal with low loss)
- *Good return loss
- *Expanded pass band for future communication channels up to 1500MHz
- *EMI-RFI>-130dB

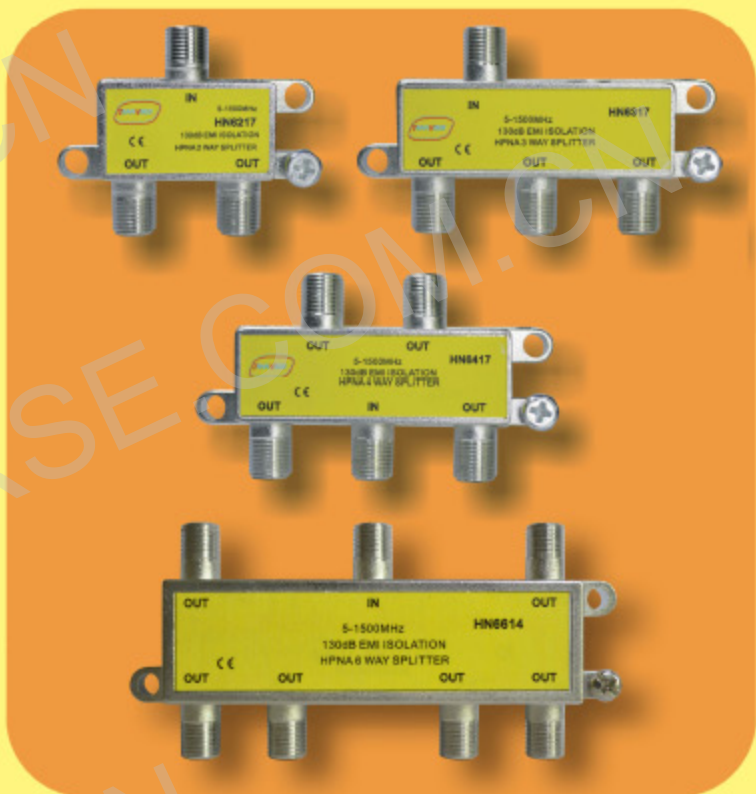

Technical specifications

Model	Frequency Range (MHz)	Value
2WAY HN6217		
Insertion Loss (Max dB)	5-1500MHz	8
Return Loss Input (Min dB)	5-1500MHz	10
Return Loss Output (Min dB)	5-1500MHz	10
ISOLATION Out-out (Max dB)	5-1500MHz	8
3WAY HN6317		
Insertion Loss (Max dB)	5-1500MHz	10
Return Loss Input (Min dB)	5-1500MHz	10
Return Loss Output (Min dB)	5-1500MHz	10
ISOLATION Out-out (Max dB)	5-1500MHz	10
4WAY HN6417		
Insertion Loss (Max dB)	5-1500MHz	12
Return Loss Input (Min dB)	5-1500MHz	10
Return Loss Output (Min dB)	5-1500MHz	10
ISOLATION Out-out (Max dB)	5-1500MHz	12
6WAY HN6617		
Insertion Loss (Max dB)	4-1500MHz	15
Return Loss Input (Min dB)	4-1500MHz	12
Return Loss Output (Min dB)	4-1500MHz	12
ISOLATION Out-out (Max dB)	4-1500MHz	15