

## TV/ SAT



### General description

RFI shielded zinc die-casting housing

Screening efficiency fulfils CENELEC 50083-2:1998, class A

IEC connector male for TV and FEMALE FOR SAT

Power passing:24VDC,0.5A, IN<-->SAT

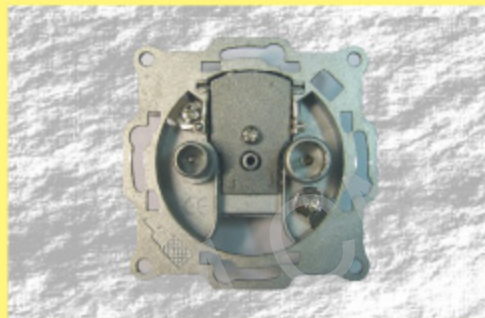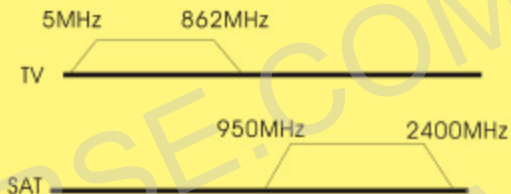

### Technical specifications

#### TYPE

	WS5010		WS5009-5		WS5009-10		WS5009-14		WS5009-18	
	TV	SAT	TV	SAT	TV	SAT	TV	SAT	TV	SAT
	5-862MHz	950-2400MHz	5-862MHz	950-2400MHz	5-862MHz	950-2400MHz	5-862MHz	950-2400MHz	5-862MHz	950-2400MHz
Thru loss	/	/	5dB	5dB	4dB	6dB	3.5dB	5.5dB	3dB	5dB
Insertion loss	2.0dB	2.5dB	5±2dB	5±3dB	10±2dB	10±3dB	14±2dB	14±3dB	18±2dB	18±3dB
Isolation(TV/SAT)	20dB	20dB	20dB	20dB	20dB	20dB	20dB	20dB	20dB	20dB
Return loss	8dB	8dB	8dB	8dB	8dB	8dB	8dB	8dB	8dB	8dB
DC PASS	/	0.5A	/	0.5A	/	0.5A	/	0.5A	/	0.5A