


General description

For analogue and digital terrestrial TV installations in medium-sized MATV networks or individual installations

Plastic with an internal zamak chassis of which provides

Maximum shielding

Built-in switch power supply

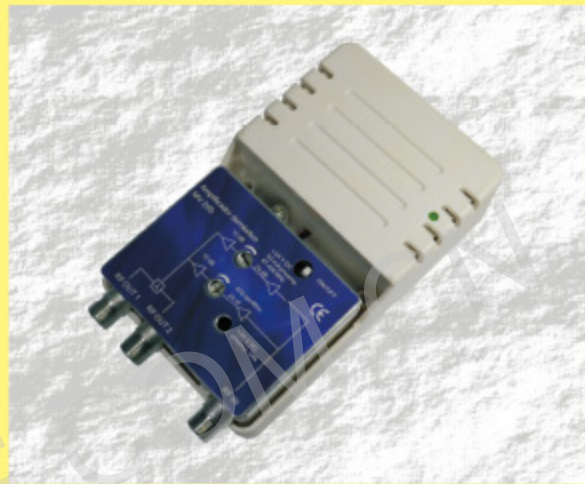

Technical specifications

T Y P E

| | P210K(1 input 2output) | | P220K(1 input 2output) | |
|-----------------------------|------------------------|-----------------|------------------------|-----------------|
| | VHF(40-318MHz) | VHF(470-790MHz) | VHF(40-318MHz) | VHF(470-790MHz) |
| Gain | 14±2.0dB | 24±2.0dB | 24±2.0dB | 24±2.0dB |
| Gain adjustment | 16dB | 12dB | 16dB | 12dB |
| Max. output level | 102dB μ V | 104dB μ V | 102dB μ V | 104dB μ V |
| Return loss | >10dB | >10dB | >10dB | >10dB |
| Noise figure | <6dB | <7dB | <6dB | <7dB |
| output voltage | 24V/50mA(or 12V/50mA) | | | |
| Power consumption | 230V/50Hz/7W | | 230V/50Hz/7W | |
| Operating temperature range | -20°C~+50°C | | -20°C~+50°C | |