
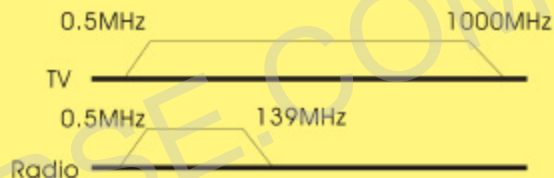


TV/ Radio

General description

RFI shielded zinc die-casting housing
Screening efficiency fulfils CENELEC 50083-2:1998, class A
IEC connector male for TV and FEMALE FOR Radio

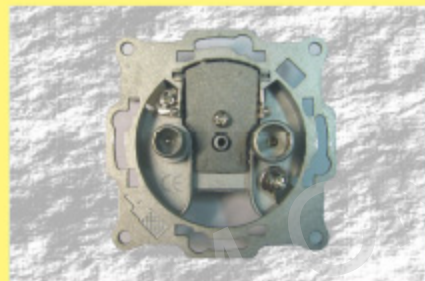

Technical specifications						
TYPE		WS5012	WS5011-4	WS5011-8	WS5011-10	
Insertion loss (IN-OUT)	5-1000 MHz	-	6dB	5dB	3.5dB	
	Insertion loss (IN-RADIO)	0.15-26 MHz	-	-	-	
		68-100 MHz	8 dB	4±1.5dB	6±1.5dB	10±1.5dB
		111-125 MHz	-	-	-	-
Insertion loss (IN-TV)	125-139 MHz	-	-	-	-	
	5-30 MHz	3 dB	-	-	-	
	47-68MHz	3dB	4±1.5dB	6±1.5dB	10±1.5dB	
	125-1000MHz	4dB	-	-	-	
Return loss	INPUT	10dB	10dB	10dB	10dB	
	OUTPUT	-	10dB	10dB	10dB	
	TV	10dB	10dB	10dB	10dB	
	RADIO	10dB	10dB	10dB	10dB	



Technical specifications				
TYPE		WS5016	WS5015-10	
Insertion loss (IN-OUT)	5-862 MHz	-	3dB	
	Insertion loss (IN-RADIO)	0.15-26 MHz	-	-
		88-108 MHz	2.5 dB	13 dB
		111-125 MHz	-	-
		125-139 MHz	-	-
Insertion loss (IN-TV)	5-30 MHz	2 dB	12dB	
	47-68MHz	2dB	12dB	
	100-125MHz	5dB	15dB	
	125-862MHz	2.5dB	13dB	
	Return loss	INPUT	10dB	10dB
OUTPUT		-	10dB	
TV		10dB	10dB	
RADIO		10dB	10dB	