


TV/ DATA

General description

RFI shielded zinc die-casting housing

Screening efficiency fulfils CENELEC 50083-2:1998, class A

IEC connector male for TV and FEMALE FOR DATA

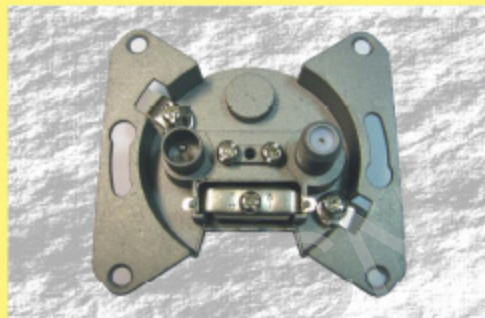

CARACTERÍSTICAS

TYPE		WS1714	WS1713
Insertion loss (IN-TV)	5-65MHz	40dB	40dB
	87.5-90MHz	5.5dB	9.0dB
	90-600MHz	5.0dB	9.0dB
	600-862MHz	5.5dB	9.0dB
Insertion loss (IN-DATA)	5-65MHz	2.0dB	5.5dB
	87.5-90MHz	5.5dB	8.5dB
	90-862MHz	5.0dB	8.5dB
Isolation (TV-DATA)	5-65MHz	35dB	35dB
	87.5-862MHz	15dB	15dB
Return loss (IN/TV/DATA)	5-862MHz	10dB	10dB