

## TV/ Radio/SAT1/SAT2

### General description



RFI shielded zinc die-casting housing

Screening efficiency fulfils CENELEC 50083-2: 1998, class A

F female connector for Sat, IEC connector male for

TV and FEMALE FOR Radio

Power passing: 24VDC, 0.5A, IN <--> SAT

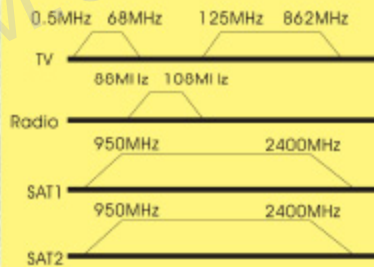

### Technical specifications

#### T Y P E

#### WS31

Insertion loss (IN-RADIO)	0.15-26MHz	-
	88-108MHz	2.0 dB
	111-120MHz	-
	120-139MHz	-
Insertion loss (IN-TV)	5-30MHz	2.5dB
	47-68MHz	2.5dB
	125-862MHz	2.5dB
Insertion loss (IN-SAT1)	950-1750MHz	3.0 dB
	1750-2150MHz	3.0 dB
	2150-2400MHz	3.0 dB
	950-1750MHz	3.0 dB
Insertion loss (IN-SAT2)	1750-2150MHz	3.0 dB
	2150-2400MHz	3.0 dB
	INPUT	5 dB
Return loss	TV	5 dB
	RADIO	5 dB
	SAT	5 dB