

General description


5 band input

DC power supply UHF-2 port

DC current and 22KHz bypass

plastic with an internal zamak chassis of which provide maximum shielding

built-in switch power supply

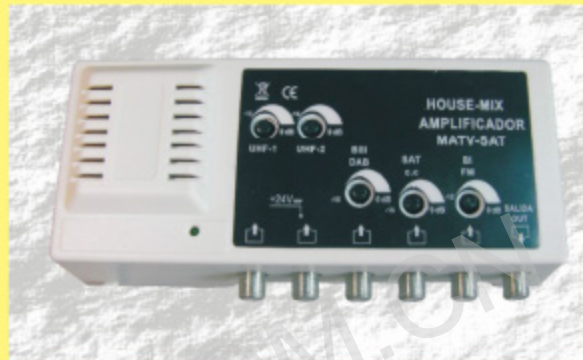

Technical specifications

TYPE

MA5035(5 input 1 output)

	UHF-1	UHF-2	BIII/DAB	BI/FM	SAT
Gain	35dB	35dB	30dB	25dB	27/32
Attenuator Range	0-15dB	0-15dB	0-15dB	0-15dB	0-15dB
Max. output level DIN45004B	115dB μ V	115dB μ V	115dB	115dB	-
Return loss	> 8dB	> 8dB	> 8dB	> 8dB	> 5dB
Noise figure	< 6dB	< 6dB	< 6dB	< 6dB	< 6dB
Output DC pass voltage		24V/50mA			
LNB output voltage					DC/22KHz bypass
Power consumption			230V/50Hz/7W		
Operating temperature range			-20° C~+50° C		